


DUAL PRE-POWER AMPLIFIER WITH DC VOLUME CONTROL

The KA22134 is a monolithic integrated circuit designed for use in low voltage and low power applications. It has all functions including a dual audio pre-power amplifier, DC volume control and headphone drive circuits.

It is suitable for portable tape recorders or headphone cassette recorders.

FEATURES

- Built-in DC volume control circuit.
- Wide operation supply voltage: $V_{CC} = 1.8 \sim 6V$
- Only a few components to build headphone cassette tape recorders.
- Built-in ripple filter.

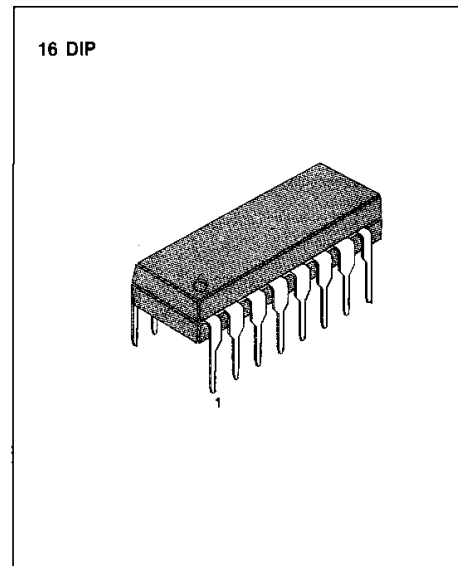

ORDERING INFORMATION

| Device | Package | Operating Temperature |
|---------|---------|-----------------------|
| KA22134 | 16 DIP | -20°C ~ +75°C |

BLOCK DIAGRAM

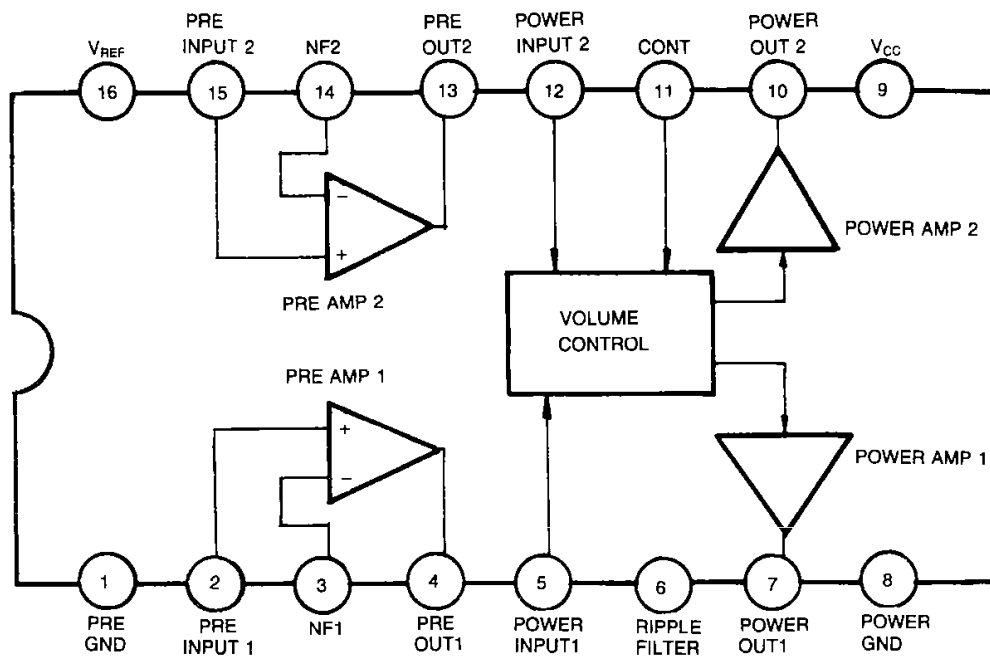


Fig. 1

ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

| Characteristic | Symbol | Value | Unit |
|-----------------------|-----------|------------|------------------|
| Supply Voltage | V_{CC} | 7 | V |
| Power Dissipation | P_D | 75 | mW |
| Operating Temperature | T_{OPR} | -20 ~ +75 | $^\circ\text{C}$ |
| Storage Temperature | T_{STG} | -40 ~ +125 | $^\circ\text{C}$ |

ELECTRICAL CHARACTERISTICS($V_{CC} = 3\text{V}$, $T_a = 25^\circ\text{C}$)

| Characteristic | Symbol | Test Conditions | Min | Typ | Max | Unit |
|---------------------------|------------|---|-----|------|-----|------|
| Quiescent Circuit Current | I_{CCQ1} | $V_I = 0$, $V_{OL} = \text{MIN}$ | | 9 | 13 | mA |
| | I_{CCQ2} | $V_I = 0$, $V_{OL} = \text{MAX}$ | | 11.0 | | mA |
| Cross Talk | CT | $R_G = 2.2\text{K}\Omega$, $V_O = -10\text{dBm}$ | 34 | 40 | | dB |

PRE-AMPLIFIER SECTION($V_{CC} = 3\text{V}$, $T_a = 25^\circ\text{C}$, $f = 1\text{KHz}$, $R_{L1} = 10\text{K}\Omega$, unless otherwise specified)

| Characteristic | Symbol | Test Conditions | Min | Typ | Max | Unit |
|--------------------------------|------------------|---|-----|------|-----|---------------|
| Open Loop Voltage Gain | G_{VO} | $V_I = 0.2\text{mV}$ | 55 | 62 | | dB |
| Closed Loop Voltage Gain | G_{VC1} | $V_O = -10\text{dBm}$, NAB 1KHz | | 33 | | dB |
| Output Voltage | V_O | THD = 1% | 600 | 720 | | mV |
| Total Harmonic Distortion | THD ₁ | $V_O = -10\text{dBm}$ | | 0.04 | 0.1 | % |
| Ripple Rejection Ratio | RR ₁ | $R_G = 2.2\text{K}\Omega$ $V_R = -20\text{dBm}$, $f_R = 100\text{Hz}$ | | 46 | | dB |
| Equivalent Input Noise Voltage | V_{NI} | $R_G = 2.2\text{K}\Omega$, BW = 30 ~ 20KHz Gain for NAB 1KHz | | 1.2 | 2.0 | μV |

POWER AMPLIFIER SECTION($V_{CC} = 3\text{V}$, $T_a = 25^\circ\text{C}$, $f = 1\text{KHz}$, $R_{L2} = 32\Omega$, unless otherwise specified)

| Characteristic | Symbol | Test Conditions | Min | Typ | Max | Unit |
|---------------------------|--------------------|---|------|-----|------|---------------|
| Output Power | P_{O1} | THD ₂ = 10% | 20 | 27 | | mW |
| | P_{O2} | THD ₂ = 10%, $R_L = 16\Omega$ | | 39 | | mW |
| Total Harmonic Distortion | THD ₂ | $P_O = 10\text{mW}$, Volume: 100% | | 0.5 | 1.2 | % |
| | THD ₃ | $P_O = 10\text{mW}$, Volume: 50% | | 0.3 | | % |
| Closed Loop Voltage Gain | G_{VC2} | $V_O = -10\text{dBm}$, Volume: 100% | 28 | 30 | 32 | dB |
| | G_{VC3} | $V_O = -10\text{dBm}$ | | 15 | | dB |
| Channel Balance | CB | $V_O = -10\text{dBm}$ | -1.5 | 0 | -1.5 | dB |
| Volume Rejection Ratio | VOL _{REJ} | $V_O = -10\text{dBm}$, Volume: 100% to 0% | 66 | 72 | | dB |
| Output Noise Voltage | V_{NO} | BW = 30 ~ 20KHz, $R_G = 600\Omega$ | | 250 | 320 | μV |
| Ripple Rejection Ratio | RR ₂ | $R_G = 600\Omega$, $f_R = 100\text{Hz}$ $V_R = -20\text{dBm}$ | | 46 | | dB |

TEST CIRCUIT

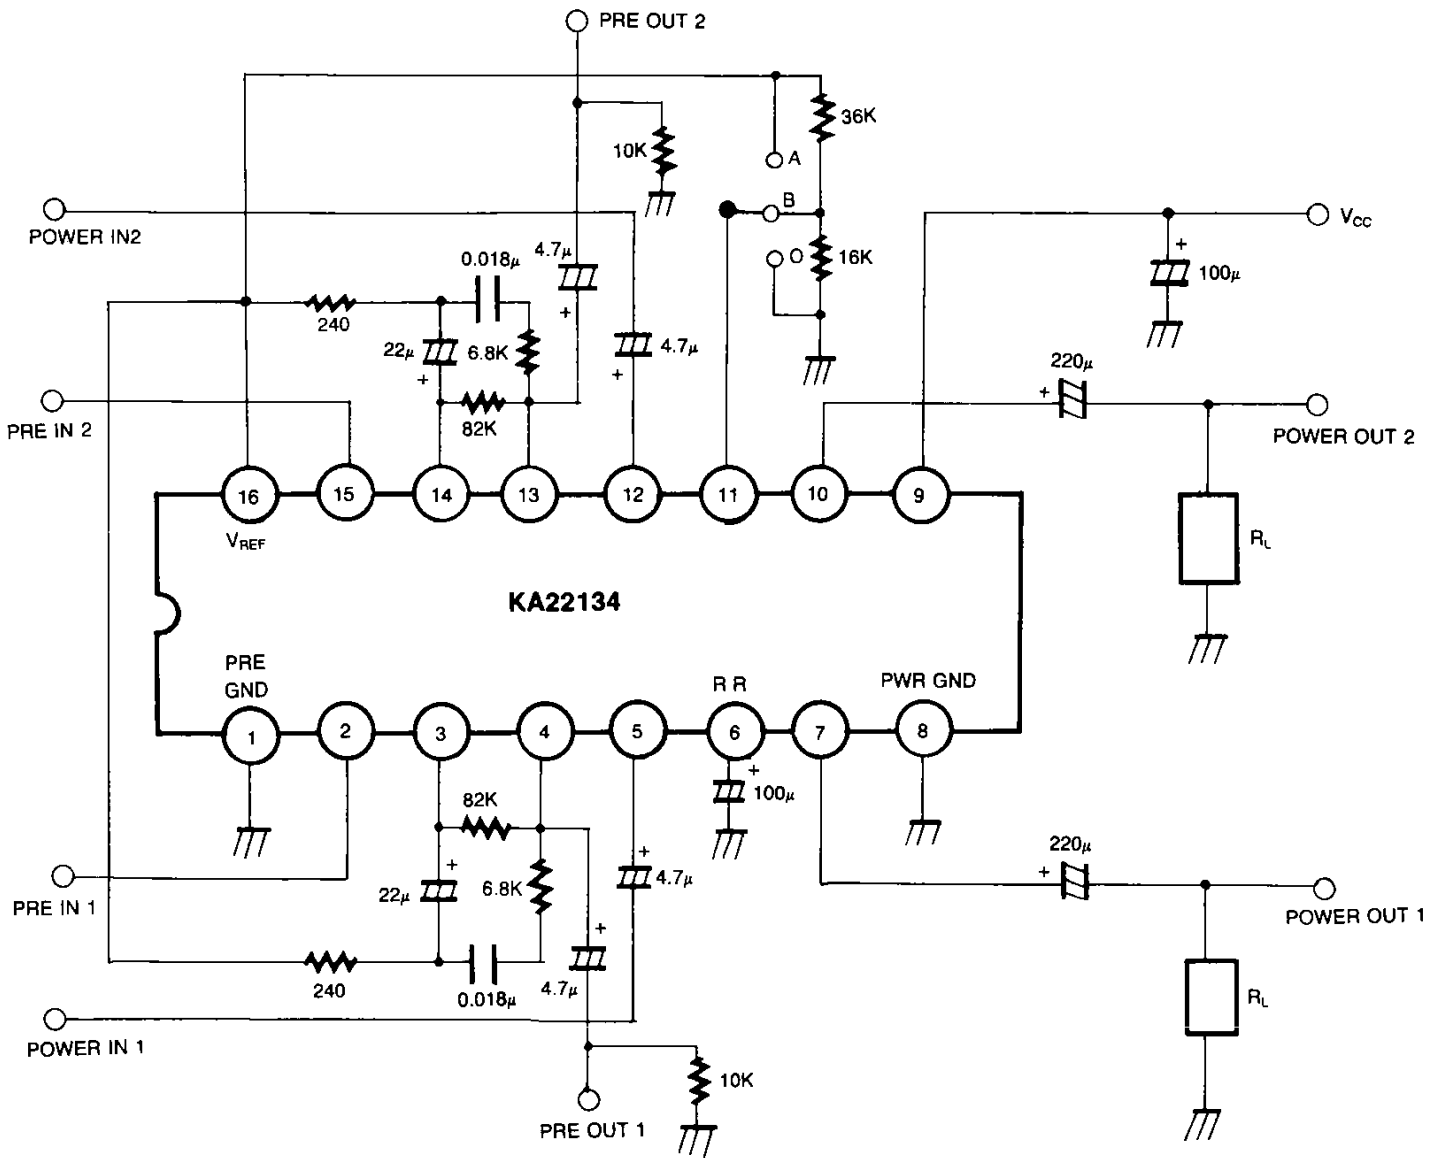


Fig. 2

APPLICATION CIRCUIT

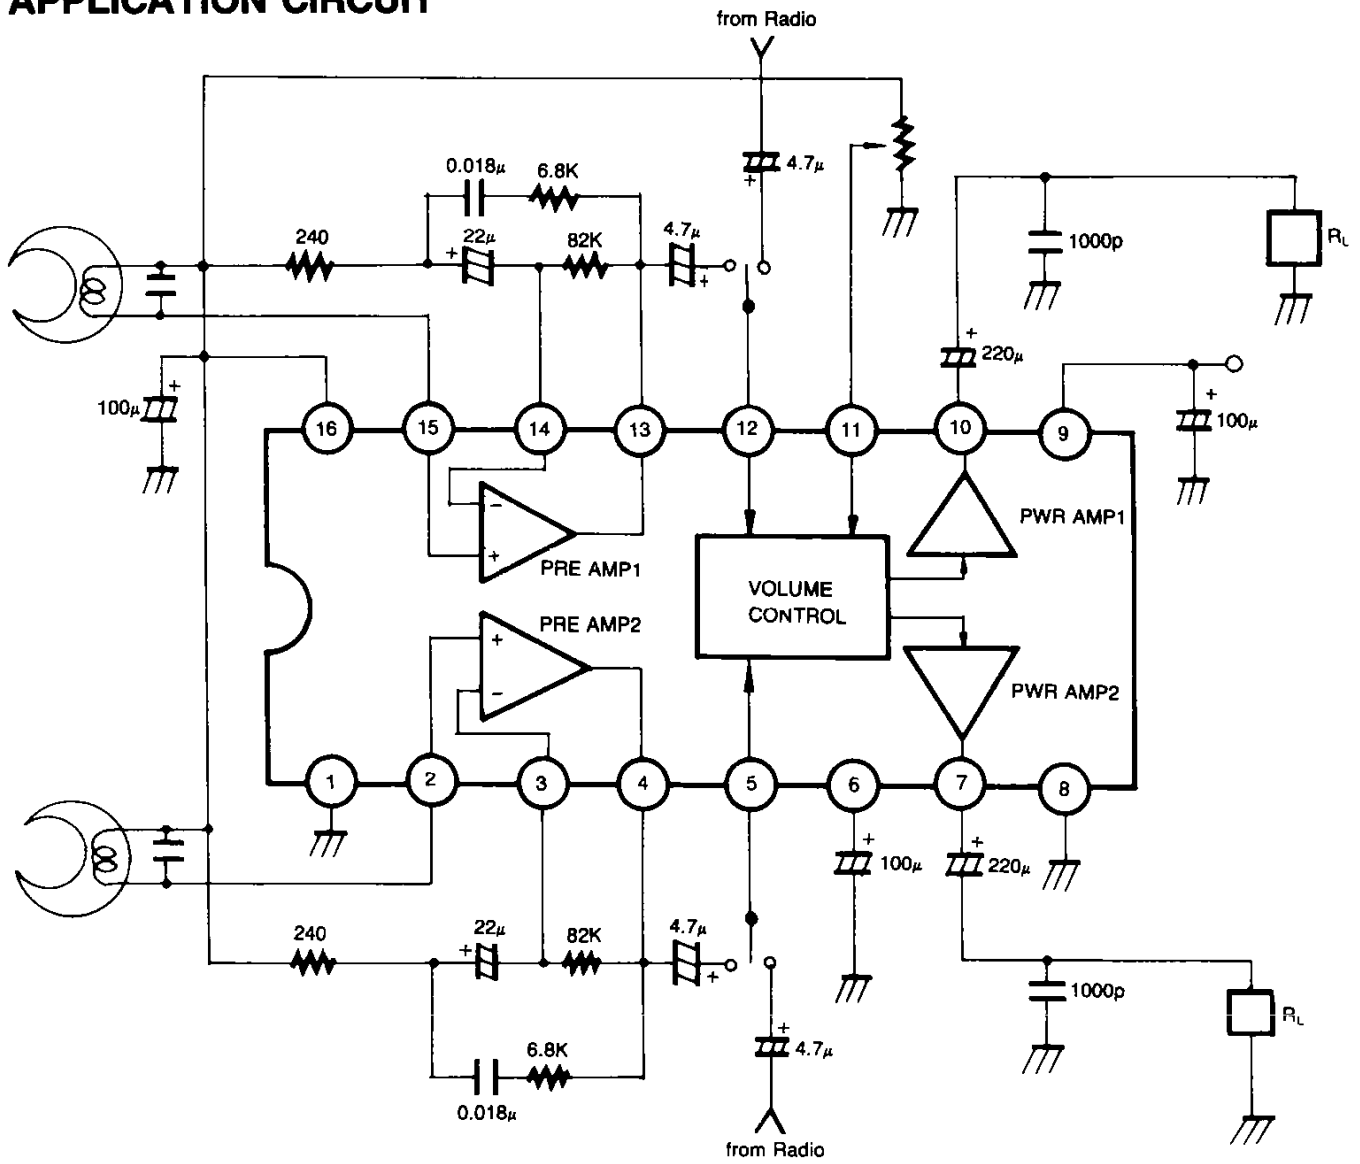


Fig. 3