


5A LOW DROP POSITIVE VOLTAGE REGULATOR ADJUSTABLE AND FIXED

- TYPICAL DROPOUT 1.3V (AT 5A)
- THREE TERMINAL ADJUSTABLE OR FIXED OUTPUT VOLTAGE 1.5V, 1.8V, 2.5V, 2.85V, 3.3V, 3.6V, 5V.
- GUARANTEED OUTPUT CURRENT UP TO 5A
- OUTPUT TOLERANCE $\pm 1\%$ AT 25°C AND $\pm 2\%$ IN FULL TEMPERATURE RANGE FOR THE "A" VERSION
- OUTPUT TOLERANCE $\pm 2\%$ AT 25°C AND $\pm 3\%$ IN FULL TEMPERATURE RANGE INTERNAL POWER AND THERMAL LIMIT
- WIDE OPERATING TEMPERATURE RANGE -40°C TO 125°C
- PACKAGE AVAILABLE : TO-220, D²PAK, D²PAK/A, DPAK
- PINOUT COMPATIBILITY WITH STANDARD ADJUSTABLE VREG

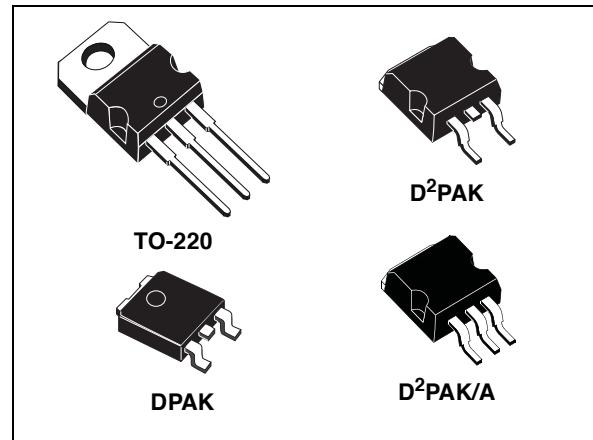


DESCRIPTION

The KD1084 is a LOW DROP Voltage Regulator able to provide up to 5A of Output Current. Dropout is guaranteed at a maximum of 1.5V at the maximum output current, decreasing at lower loads. The KD1084 is pin to pin compatible with the older 3-terminal adjustable regulators, but has better performances in term of drop and output tolerance .

A 2.85V output version is suitable for SCSI-2 active termination. Unlike PNP regulators, where a part of the output current is wasted as quiescent current, the KD1084 quiescent current flows into the load, so increase efficiency. Only a 10 μ F minimum capacitor is need for stability.

The devices are supplied in TO-220, D²PAK, D²PAK/A and DPAK. On chip trimming allows the regulator to reach a very tight output voltage tolerance, within $\pm 1\%$ at 25°C for "A" version and $\pm 2\%$ at 25°C for standard version.

SCHEMATIC DIAGRAM

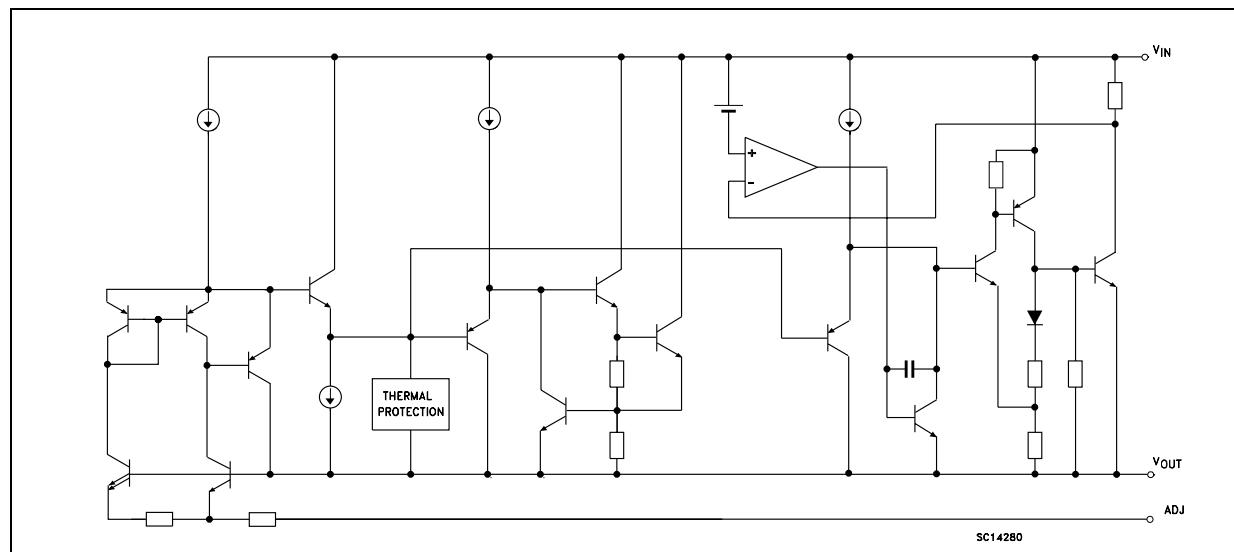

KD1084 SERIES

ABSOLUTE MAXIMUM RATINGS


| Symbol | Parameter ² | Value | Unit |
|------------------|--------------------------------------|--------------------|------|
| V _I | DC Input Voltage | 12 | V |
| I _O | Output Current | Internally Limited | mA |
| P _D | Power Dissipation | Internally Limited | mW |
| T _{stg} | Storage Temperature Range | -55 to +150 | °C |
| T _{op} | Operating Junction Temperature Range | -40 to +125 | °C |

Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these condition is not implied.


THERMAL DATA

| Symbol | Parameter | TO-220 | D ² PAK D ² PAK/A | DPAK | Unit |
|-----------------------|-------------------------------------|--------|--|------|------|
| R _{thj-case} | Thermal Resistance Junction-case | 3 | 3 | 3 | °C/W |
| R _{thj-amb} | Thermal Resistance Junction-ambient | 50 | 62.5 | 50 | °C/W |

APPLICATION CIRCUITS

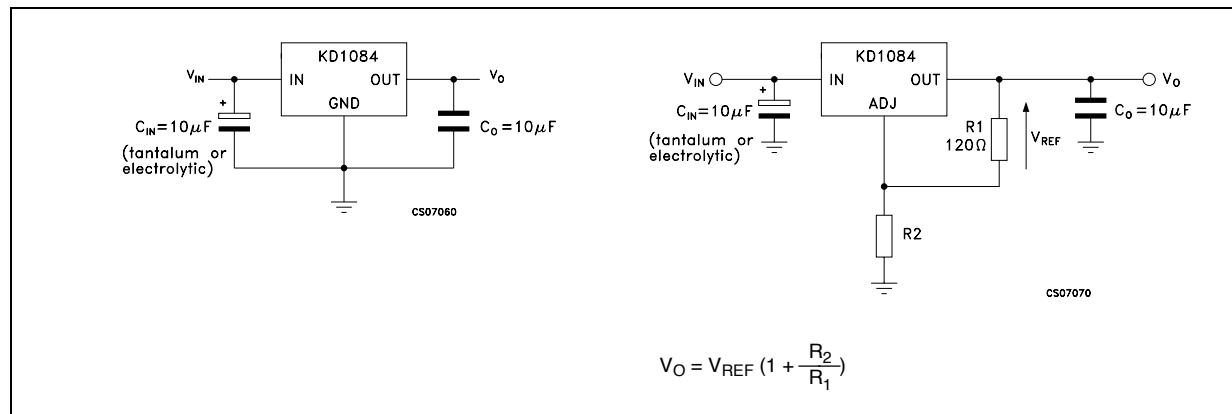

CONNECTION DIAGRAM (top view)

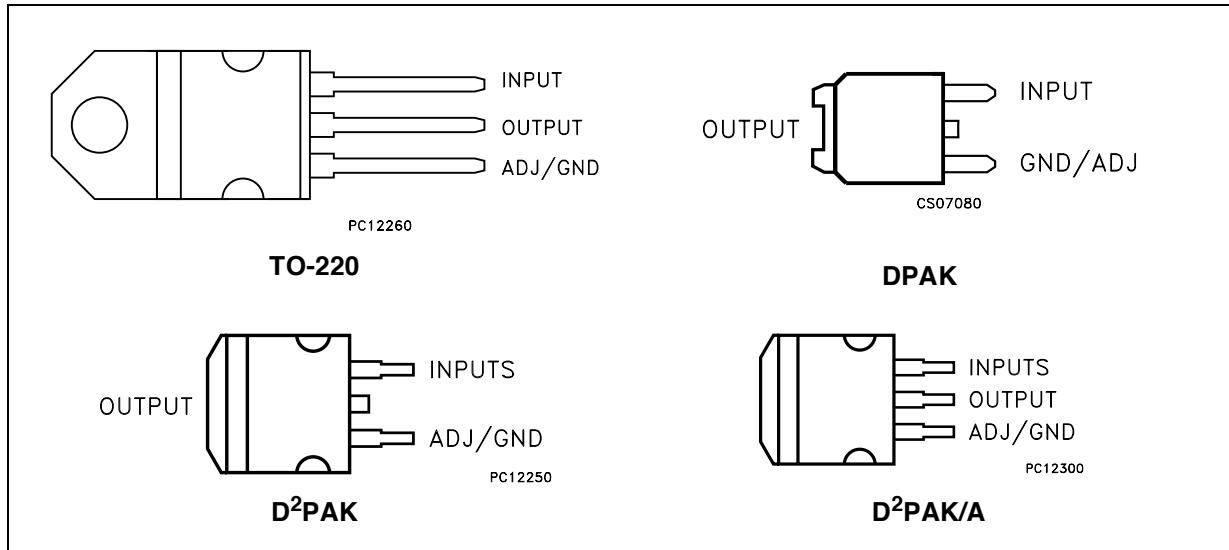

ORDERING CODES

| TO-220 | D ² PAK (**) | D ² PAK/A | DPAK | OUTPUT VOLTAGE | TOLERANCE |
|----------------|-------------------------|----------------------|-----------------|----------------|-----------|
| KD1084V15 (*) | KD1084D2T15 | KD1084D2M15 | KD1084DT15 | 1.5 V | 2% |
| KD1084AV15 (*) | KD1084AD2T15 | KD1084AD2M15 | KD1084ADT15 | 1.5 V | 1% |
| KD1084V18 | KD1084D2T18 | KD1084D2M18 | KD1084DT18 | 1.8 V | 2% |
| KD1084AV18 | KD1084AD2T18 | KD1084AD2M18 | KD1084ADT18 | 1.8 V | 1% |
| KD1084V25 | KD1084D2T25 | KD1084D2M25 | KD1084DT25 (*) | 2.5 V | 2% |
| KD1084AV25 | KD1084AD2T25 | KD1084AD2M25 | KD1084ADT25 (*) | 2.5 V | 1% |
| KD1084V28 (*) | KD1084D2T28 (*) | KD1084D2M28 (*) | KD1084DT28 (*) | 2.85 V | 2% |
| KD1084AV28 (*) | KD1084AD2T28 (*) | KD1084AD2M28 (*) | KD1084ADT28 (*) | 2.85 V | 1% |
| KD1084V33 | KD1084D2T33 | KD1084D2M33 | KD1084DT33 | 3.3 V | 2% |
| KD1084AV33 | KD1084AD2T33 | KD1084AD2M33 | KD1084ADT33 | 3.3 V | 1% |
| KD1084V36 | KD1084D2T36 | KD1084D2M36 | KD1084DT36 | 3.6 V | 2% |
| KD1084AV36 | KD1084AD2T36 | KD1084AD2M36 | KD1084ADT36 | 3.6 V | 1% |
| KD1084V50 | KD1084D2T50 | KD1084D2M50 | KD1084DT50 (*) | 5.0 V | 2% |
| KD1084AV50 | KD1084AD2T50 | KD1084AD2M50 | KD1084ADT50 (*) | 5.0 V | 1% |
| KD1084V | KD1084D2T | KD1084D2M | KD1084DT | ADJ | 2% |
| KD1084AV | KD1084AD2T | KD1084AD2M | KD1084ADT | ADJ | 1% |

(*) Available on request

(**) Available in Tape & Reel with the suffix "R" for fixed versions and "-R" for adjustable version

KD1084 SERIES

ELECTRICAL CHARACTERISTICS OF KD1084A#15 ($V_I=4.5V$, $C_I = C_O = 10\mu F$ (Tant.), $T_A = -40$ to $125^\circ C$, unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|--------------|--|--|-------|-------|-------|------|
| V_O | Output Voltage | $I_O = 0 \text{ mA}$ $T_J = 25^\circ C$ | 1.485 | 1.5 | 1.515 | V |
| | | $I_O = 0 \text{ to } 5\text{A}$ $V_I = 3.1 \text{ to } 10\text{V}$ | 1.47 | 1.5 | 1.53 | V |
| ΔV_O | Line Regulation | $I_O = 0 \text{ mA}$ $V_I = 3.1 \text{ to } 10\text{V}$ $T_J = 25^\circ C$ | | 0.5 | 6 | mV |
| | | $I_O = 0 \text{ mA}$ $V_I = 3.1 \text{ to } 10\text{V}$ | | 1 | 6 | mV |
| ΔV_O | Load Regulation | $I_O = 0 \text{ to } 5\text{A}$ $T_J = 25^\circ C$ | | 3 | 15 | mV |
| | | $I_O = 0 \text{ to } 5\text{A}$ | | 7 | 20 | V |
| V_d | Dropout Voltage | $I_O = 5 \text{ A}$ | | 1.3 | 1.5 | V |
| I_q | Quiescent Current | $V_I \leq 10\text{V}$ | | 5 | 10 | mA |
| I_{sc} | Short Circuit Current | $V_I - V_O = 5\text{V}$ | 5.5 | 7 | | A |
| | Termal Regulation | $T_A = 25^\circ C$, 30ms pulse | | 0.003 | 0.015 | %/W |
| SVR | Supply Voltage Rejection | $f = 120 \text{ Hz}$, $C_O = 25 \mu F$, $I_O = 5\text{A}$ $V_I = 5 \pm 1.5\text{V}$ | 60 | 75 | | dB |
| eN | RMS Output Noise Voltage (% of V_O) | $T_A = 25^\circ C$ $f = 10\text{Hz} \text{ to } 10\text{KHz}$ | | 0.003 | | % |
| S | Temperature Stability | | | 0.5 | | % |
| S | Long Term Stability | $T_A = 125^\circ C$ 1000Hrs | | 0.5 | | % |

ELECTRICAL CHARACTERISTICS OF KD1084A#18 ($V_I=4.8V$, $C_I = C_O = 10\mu F$ (Tant.), $T_A = -40$ to $125^\circ C$, unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|--------------|--|--|-------|-------|-------|------|
| V_O | Output Voltage | $I_O = 0 \text{ mA}$ $T_J = 25^\circ C$ | 1.782 | 1.8 | 1.818 | V |
| | | $I_O = 0 \text{ to } 5\text{A}$ $V_I = 3.4 \text{ to } 10\text{V}$ | 1.764 | 1.8 | 1.836 | V |
| ΔV_O | Line Regulation | $I_O = 0 \text{ mA}$ $V_I = 3.4 \text{ to } 10\text{V}$ $T_J = 25^\circ C$ | | 0.5 | 6 | mV |
| | | $I_O = 0 \text{ mA}$ $V_I = 3.4 \text{ to } 10\text{V}$ | | 1 | 6 | mV |
| ΔV_O | Load Regulation | $I_O = 0 \text{ to } 5\text{A}$ $T_J = 25^\circ C$ | | 3 | 15 | mV |
| | | $I_O = 0 \text{ to } 5\text{A}$ | | 7 | 20 | V |
| V_d | Dropout Voltage | $I_O = 5 \text{ A}$ | | 1.3 | 1.5 | V |
| I_q | Quiescent Current | $V_I \leq 10\text{V}$ | | 5 | 10 | mA |
| I_{sc} | Short Circuit Current | $V_I - V_O = 5\text{V}$ | 5.5 | 7 | | A |
| | Termal Regulation | $T_A = 25^\circ C$, 30ms pulse | | 0.003 | 0.015 | %/W |
| SVR | Supply Voltage Rejection | $f = 120 \text{ Hz}$, $C_O = 25 \mu F$, $I_O = 5\text{A}$ $V_I = 5.3 \pm 1.5\text{V}$ | 60 | 75 | | dB |
| eN | RMS Output Noise Voltage (% of V_O) | $T_A = 25^\circ C$ $f = 10\text{Hz} \text{ to } 10\text{KHz}$ | | 0.003 | | % |
| S | Temperature Stability | | | 0.5 | | % |
| S | Long Term Stability | $T_A = 125^\circ C$ 1000Hrs | | 0.5 | | % |

ELECTRICAL CHARACTERISTICS OF KD1084A#25 ($V_I=5.5V$, $C_I = C_O = 10\mu F$ (Tant.), $T_A = -40$ to $125^\circ C$, unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|--------------|--|--|-------|-------|-------|------|
| V_O | Output Voltage | $I_O = 0 \text{ mA}$ $T_J = 25^\circ C$ | 2.475 | 2.5 | 2.525 | V |
| | | $I_O = 0 \text{ to } 5\text{A}$ $V_I = 4.1 \text{ to } 10\text{V}$ | 2.45 | 2.5 | 2.55 | V |
| ΔV_O | Line Regulation | $I_O = 0 \text{ mA}$ $V_I = 4.1 \text{ to } 10\text{V}$ $T_J = 25^\circ C$ | | 0.5 | 6 | mV |
| | | $I_O = 0 \text{ mA}$ $V_I = 4.1 \text{ to } 10\text{V}$ | | 1 | 6 | mV |
| ΔV_O | Load Regulation | $I_O = 0 \text{ to } 5\text{A}$ $T_J = 25^\circ C$ | | 3 | 15 | mV |
| | | $I_O = 0 \text{ to } 5\text{A}$ | | 7 | 20 | V |
| V_d | Dropout Voltage | $I_O = 5 \text{ A}$ | | 1.3 | 1.5 | V |
| I_q | Quiescent Current | $V_I \leq 10\text{V}$ | | 5 | 10 | mA |
| I_{sc} | Short Circuit Current | $V_I - V_O = 5\text{V}$ | 5.5 | 7 | | A |
| | Termal Regulation | $T_A = 25^\circ C$, 30ms pulse | | 0.003 | 0.015 | %/W |
| SVR | Supply Voltage Rejection | $f = 120 \text{ Hz}$, $C_O = 25 \mu F$, $I_O = 5\text{A}$ $V_I = 6 \pm 1.5\text{V}$ | 60 | 72 | | dB |
| eN | RMS Output Noise Voltage (% of V_O) | $T_A = 25^\circ C$ $f = 10\text{Hz} \text{ to } 10\text{KHz}$ | | 0.003 | | % |
| S | Temperature Stability | | | 0.5 | | % |
| S | Long Term Stability | $T_A = 125^\circ C$ 1000Hrs | | 0.5 | | % |

ELECTRICAL CHARACTERISTICS OF KD1084A#285 ($V_I=5.85V$, $C_I = C_O = 10\mu F$ (Tant.), $T_A = -40$ to $125^\circ C$, unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|--------------|--|---|-------|-------|-------|------|
| V_O | Output Voltage | $I_O = 0 \text{ mA}$ $T_J = 25^\circ C$ | 2.821 | 2.85 | 2.879 | V |
| | | $I_O = 0 \text{ to } 5\text{A}$ $V_I = 4.5 \text{ to } 10\text{V}$ | 2.793 | 2.85 | 2.907 | V |
| ΔV_O | Line Regulation | $I_O = 0 \text{ mA}$ $V_I = 4.5 \text{ to } 10\text{V}$ $T_J = 25^\circ C$ | | 0.5 | 6 | mV |
| | | $I_O = 0 \text{ mA}$ $V_I = 4.5 \text{ to } 10\text{V}$ | | 1 | 6 | mV |
| ΔV_O | Load Regulation | $I_O = 0 \text{ to } 5\text{A}$ $T_J = 25^\circ C$ | | 3 | 15 | mV |
| | | $I_O = 0 \text{ to } 5\text{A}$ | | 7 | 20 | V |
| V_d | Dropout Voltage | $I_O = 5 \text{ A}$ | | 1.3 | 1.5 | V |
| I_q | Quiescent Current | $V_I \leq 10\text{V}$ | | 5 | 10 | mA |
| I_{sc} | Short Circuit Current | $V_I - V_O = 5\text{V}$ | 5.5 | 7 | | A |
| | Termal Regulation | $T_A = 25^\circ C$, 30ms pulse | | 0.003 | 0.015 | %/W |
| SVR | Supply Voltage Rejection | $f = 120 \text{ Hz}$, $C_O = 25 \mu F$, $I_O = 5\text{A}$ $V_I = 6.35 \pm 1.5\text{V}$ | 60 | 72 | | dB |
| eN | RMS Output Noise Voltage (% of V_O) | $T_A = 25^\circ C$ $f = 10\text{Hz} \text{ to } 10\text{KHz}$ | | 0.003 | | % |
| S | Temperature Stability | | | 0.5 | | % |
| S | Long Term Stability | $T_A = 125^\circ C$ 1000Hrs | | 0.5 | | % |

KD1084 SERIES

ELECTRICAL CHARACTERISTICS OF KD1084A#33 ($V_I=6.3V$, $C_I = C_O = 10\mu F$ (Tant.), $T_A = -40$ to $125^\circ C$, unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|--------------|--|--|-------|-------|-------|------|
| V_O | Output Voltage | $I_O = 0 \text{ mA}$ $T_J = 25^\circ C$ | 3.267 | 3.3 | 3.333 | V |
| | | $I_O = 0 \text{ to } 5\text{A}$ $V_I = 4.9 \text{ to } 10\text{V}$ | 3.234 | 3.35 | 3.366 | V |
| ΔV_O | Line Regulation | $I_O = 0 \text{ mA}$ $V_I = 4.9 \text{ to } 10\text{V}$ $T_J = 25^\circ C$ | | 0.5 | 6 | mV |
| | | $I_O = 0 \text{ mA}$ $V_I = 4.9 \text{ to } 10\text{V}$ | | 1 | 6 | mV |
| ΔV_O | Load Regulation | $I_O = 0 \text{ to } 5\text{A}$ $T_J = 25^\circ C$ | | 3 | 15 | mV |
| | | $I_O = 0 \text{ to } 5\text{A}$ | | 7 | 20 | V |
| V_d | Dropout Voltage | $I_O = 5 \text{ A}$ | | 1.3 | 1.5 | V |
| I_q | Quiescent Current | $V_I \leq 10\text{V}$ | | 5 | 10 | mA |
| I_{sc} | Short Circuit Current | $V_I - V_O = 5\text{V}$ | 5.5 | 7 | | A |
| | Termal Regulation | $T_A = 25^\circ C$, 30ms pulse | | 0.003 | 0.015 | %/W |
| SVR | Supply Voltage Rejection | $f = 120 \text{ Hz}$, $C_O = 25 \mu F$, $I_O = 5\text{A}$ $V_I = 6.8 \pm 1.5\text{V}$ | 60 | 72 | | dB |
| eN | RMS Output Noise Voltage (% of V_O) | $T_A = 25^\circ C$ $f = 10\text{Hz} \text{ to } 10\text{KHz}$ | | 0.003 | | % |
| S | Temperature Stability | | | 0.5 | | % |
| S | Long Term Stability | $T_A = 125^\circ C$ 1000Hrs | | 0.5 | | % |

ELECTRICAL CHARACTERISTICS OF KD1084A#36 ($V_I=6.6V$, $C_I = C_O = 10\mu F$ (Tant.), $T_A = -40$ to $125^\circ C$, unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|--------------|--|--|-------|-------|-------|------|
| V_O | Output Voltage | $I_O = 0 \text{ mA}$ $T_J = 25^\circ C$ | 3.564 | 3.6 | 3.636 | V |
| | | $I_O = 0 \text{ to } 5\text{A}$ $V_I = 5.2 \text{ to } 10\text{V}$ | 3.528 | 3.6 | 3.672 | V |
| ΔV_O | Line Regulation | $I_O = 0 \text{ mA}$ $V_I = 5.2 \text{ to } 10\text{V}$ $T_J = 25^\circ C$ | | 0.5 | 10 | mV |
| | | $I_O = 0 \text{ mA}$ $V_I = 5.2 \text{ to } 10\text{V}$ | | 1 | 10 | mV |
| ΔV_O | Load Regulation | $I_O = 0 \text{ to } 5\text{A}$ $T_J = 25^\circ C$ | | 3 | 15 | mV |
| | | $I_O = 0 \text{ to } 5\text{A}$ | | 7 | 20 | V |
| V_d | Dropout Voltage | $I_O = 5 \text{ A}$ | | 1.3 | 1.5 | V |
| I_q | Quiescent Current | $V_I \leq 10\text{V}$ | | 5 | 10 | mA |
| I_{sc} | Short Circuit Current | $V_I - V_O = 5\text{V}$ | 5.5 | 7 | | A |
| | Termal Regulation | $T_A = 25^\circ C$, 30ms pulse | | 0.003 | 0.015 | %/W |
| SVR | Supply Voltage Rejection | $f = 120 \text{ Hz}$, $C_O = 25 \mu F$, $I_O = 5\text{A}$ $V_I = 7.1 \pm 1.5\text{V}$ | 60 | 72 | | dB |
| eN | RMS Output Noise Voltage (% of V_O) | $T_A = 25^\circ C$ $f = 10\text{Hz} \text{ to } 10\text{KHz}$ | | 0.003 | | % |
| S | Temperature Stability | | | 0.5 | | % |
| S | Long Term Stability | $T_A = 125^\circ C$ 1000Hrs | | 0.5 | | % |

ELECTRICAL CHARACTERISTICS OF KD1084A#5 ($V_I=8V$, $C_I = C_O = 10\mu F$ (Tant.), $T_A = -40$ to $125^\circ C$, unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|--------------|--|--|------|-------|-------|------|
| V_O | Output Voltage | $I_O = 0 \text{ mA}$ $T_J = 25^\circ C$ | 4.95 | 5 | 5.05 | V |
| | | $I_O = 0 \text{ to } 5\text{A}$ $V_I = 6.6 \text{ to } 10\text{V}$ | 4.9 | 5 | 5.1 | V |
| ΔV_O | Line Regulation | $I_O = 0 \text{ mA}$ $V_I = 6.6 \text{ to } 10\text{V}$ $T_J = 25^\circ C$ | | 0.5 | 10 | mV |
| | | $I_O = 0 \text{ mA}$ $V_I = 6.6 \text{ to } 10\text{V}$ | | 1 | 10 | mV |
| ΔV_O | Load Regulation | $I_O = 0 \text{ to } 5\text{A}$ $T_J = 25^\circ C$ | | 5 | 20 | mV |
| | | $I_O = 0 \text{ to } 5\text{A}$ | | 10 | 35 | V |
| V_d | Dropout Voltage | $I_O = 5 \text{ A}$ | | 1.3 | 1.5 | V |
| I_q | Quiescent Current | $V_I \leq 10\text{V}$ | | 5 | 10 | mA |
| I_{sc} | Short Circuit Current | $V_I - V_O = 5\text{V}$ | 5.5 | 7 | | A |
| | Termal Regulation | $T_A = 25^\circ C$, 30ms pulse | | 0.003 | 0.015 | %/W |
| SVR | Supply Voltage Rejection | $f = 120 \text{ Hz}$, $C_O = 25 \mu F$, $I_O = 5\text{A}$ $V_I = 8.5 \pm 1.5\text{V}$ | 60 | 72 | | dB |
| eN | RMS Output Noise Voltage (% of V_O) | $T_A = 25^\circ C$ $f = 10\text{Hz} \text{ to } 10\text{KHz}$ | | 0.003 | | % |
| S | Temperature Stability | | | 0.5 | | % |
| S | Long Term Stability | $T_A = 125^\circ C$ 1000Hrs | | 0.5 | | % |

ELECTRICAL CHARACTERISTICS OF KD1084A ($V_I=4.25V$, $C_I = C_O = 10\mu F$ (Tant.), $T_A = -40$ to $125^\circ C$, unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|------------------|--|--|-------|-------|-------|---------|
| V_O | Output Voltage | $I_O = 10\text{mA}$ $T_J = 25^\circ C$ | 1.237 | 1.25 | 1.263 | V |
| | | $I_O = 10\text{mA} \text{ to } 5\text{A}$ $V_I = 2.85 \text{ to } 10\text{V}$ | 1.225 | 1.25 | 1.275 | V |
| ΔV_O | Line Regulation | $I_O = 10\text{mA}$ $V_I = 2.85 \text{ to } 10\text{V}$ $T_J = 25^\circ C$ | | 0.015 | 0.2 | % |
| | | $I_O = 10\text{mA}$ $V_I = 2.85 \text{ to } 10\text{V}$ | | 0.035 | 0.2 | % |
| ΔV_O | Load Regulation | $I_O = 10\text{mA} \text{ to } 5\text{A}$ $T_J = 25^\circ C$ | | 0.1 | 0.3 | % |
| | | $I_O = 10\text{mA} \text{ to } 5\text{A}$ | | 0.2 | 0.4 | % |
| V_d | Dropout Voltage | $I_O = 5\text{A}$ | | 1.3 | 1.5 | V |
| $I_{O(min)}$ | Minimum Load Current | $V_I = 10\text{V}$ | | 3 | 10 | mA |
| I_{sc} | Short Circuit Current | $V_I - V_O = 5\text{V}$ | 5.5 | 7 | | A |
| | Termal Regulation | $T_A = 25^\circ C$, 30ms pulse | | 0.003 | 0.015 | %/W |
| SVR | Supply Voltage Rejection | $f = 120 \text{ Hz}$, $C_O = 25 \mu F$, $C_{ADJ} = 25 \mu F$, $I_O = 5\text{A}$ $V_I = 4.75 \pm 1.5\text{V}$ | 60 | 72 | | dB |
| I_{ADJ} | Adjust Pin Current | $V_I = 4.25\text{V}$ $I_O = 10 \text{ mA}$ | | 55 | 120 | μA |
| ΔI_{ADJ} | Adjust Pin Current Change | $I_O = 10\text{mA} \text{ to } 5\text{A}$ $V_I = 2.85 \text{ to } 10\text{V}$ | | 0.2 | 5 | μA |
| eN | RMS Output Noise Voltage (% of V_O) | $T_A = 25^\circ C$ $f = 10\text{Hz} \text{ to } 10\text{KHz}$ | | 0.003 | | % |
| S | Temperature Stability | | | 0.5 | | % |
| S | Long Term Stability | $T_A = 125^\circ C$ 1000Hrs | | 0.5 | | % |

KD1084 SERIES

ELECTRICAL CHARACTERISTICS OF KD1084#15 ($V_I=4.5V$, $C_I=C_O=10\mu F$ (Tant.), $T_A = -40$ to $125^\circ C$, unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|--------------|--|--|-------|-------|-------|------|
| V_O | Output Voltage | $I_O = 0 \text{ mA}$ $T_J = 25^\circ C$ | 1.47 | 1.5 | 1.536 | V |
| | | $I_O = 0 \text{ to } 5A$ $V_I = 3.1 \text{ to } 10V$ | 1.455 | 1.5 | 1.545 | V |
| ΔV_O | Line Regulation | $I_O = 0 \text{ mA}$ $V_I = 3.1 \text{ to } 10V$ $T_J = 25^\circ C$ | | 0.5 | 6 | mV |
| | | $I_O = 0 \text{ mA}$ $V_I = 3.1 \text{ to } 10V$ | | 1 | 6 | mV |
| ΔV_O | Load Regulation | $I_O = 0 \text{ to } 5A$ $T_J = 25^\circ C$ | | 3 | 15 | mV |
| | | $I_O = 0 \text{ to } 5A$ | | 7 | 20 | V |
| V_d | Dropout Voltage | $I_O = 5 A$ | | 1.3 | 1.5 | V |
| I_q | Quiescent Current | $V_I \leq 10V$ | | 5 | 10 | mA |
| I_{sc} | Short Circuit Current | $V_I - V_O = 5V$ | 5.5 | 7 | | A |
| | Termal Regulation | $T_A = 25^\circ C$, 30ms pulse | | 0.003 | 0.015 | %/W |
| SVR | Supply Voltage Rejection | $f = 120 \text{ Hz}$, $C_O = 25 \mu F$, $I_O = 5A$ $V_I = 5 \pm 1.5V$ | 60 | 75 | | dB |
| eN | RMS Output Noise Voltage (% of V_O) | $T_A = 25^\circ C$ $f = 10Hz \text{ to } 10KHz$ | | 0.003 | | % |
| S | Temperature Stability | | | 0.5 | | % |
| S | Long Term Stability | $T_A = 125^\circ C$ 1000Hrs | | 0.5 | | % |

ELECTRICAL CHARACTERISTICS OF KD1084#18 ($V_I=4.8V$, $C_I=C_O=10\mu F$ (Tant.), $T_A = -40$ to $125^\circ C$, unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|--------------|--|--|-------|-------|-------|------|
| V_O | Output Voltage | $I_O = 0 \text{ mA}$ $T_J = 25^\circ C$ | 1.764 | 1.8 | 1.836 | V |
| | | $I_O = 0 \text{ to } 5A$ $V_I = 3.4 \text{ to } 10V$ | 1.746 | 1.8 | 1.854 | V |
| ΔV_O | Line Regulation | $I_O = 0 \text{ mA}$ $V_I = 3.4 \text{ to } 10V$ $T_J = 25^\circ C$ | | 0.5 | 6 | mV |
| | | $I_O = 0 \text{ mA}$ $V_I = 3.4 \text{ to } 10V$ | | 1 | 6 | mV |
| ΔV_O | Load Regulation | $I_O = 0 \text{ to } 5A$ $T_J = 25^\circ C$ | | 3 | 15 | mV |
| | | $I_O = 0 \text{ to } 5A$ | | 7 | 20 | V |
| V_d | Dropout Voltage | $I_O = 5 A$ | | 1.3 | 1.5 | V |
| I_q | Quiescent Current | $V_I \leq 10V$ | | 5 | 10 | mA |
| I_{sc} | Short Circuit Current | $V_I - V_O = 5V$ | 5.5 | 7 | | A |
| | Termal Regulation | $T_A = 25^\circ C$, 30ms pulse | | 0.003 | 0.015 | %/W |
| SVR | Supply Voltage Rejection | $f = 120 \text{ Hz}$, $C_O = 25 \mu F$, $I_O = 5A$ $V_I = 5.3 \pm 1.5V$ | 60 | 75 | | dB |
| eN | RMS Output Noise Voltage (% of V_O) | $T_A = 25^\circ C$ $f = 10Hz \text{ to } 10KHz$ | | 0.003 | | % |
| S | Temperature Stability | | | 0.5 | | % |
| S | Long Term Stability | $T_A = 125^\circ C$ 1000Hrs | | 0.5 | | % |

ELECTRICAL CHARACTERISTICS OF KD1084#25 ($V_I=5.5V$, $C_I = C_O = 10\mu F$ (Tant.), $T_A = -40$ to $125^\circ C$, unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|--------------|--|--|-------|-------|-------|------|
| V_O | Output Voltage | $I_O = 0 \text{ mA}$ $T_J = 25^\circ C$ | 2.45 | 2.5 | 2.55 | V |
| | | $I_O = 0 \text{ to } 5A$ $V_I = 4.1 \text{ to } 10V$ | 2.425 | 2.5 | 2.575 | V |
| ΔV_O | Line Regulation | $I_O = 0 \text{ mA}$ $V_I = 4.1 \text{ to } 10V$ $T_J = 25^\circ C$ | | 0.5 | 6 | mV |
| | | $I_O = 0 \text{ mA}$ $V_I = 4.1 \text{ to } 10V$ | | 1 | 6 | mV |
| ΔV_O | Load Regulation | $I_O = 0 \text{ to } 5A$ $T_J = 25^\circ C$ | | 3 | 15 | mV |
| | | $I_O = 0 \text{ to } 5A$ | | 7 | 20 | V |
| V_d | Dropout Voltage | $I_O = 5 A$ | | 1.3 | 1.5 | V |
| I_q | Quiescent Current | $V_I \leq 10V$ | | 5 | 10 | mA |
| I_{sc} | Short Circuit Current | $V_I - V_O = 5V$ | 5.5 | 7 | | A |
| | Termal Regulation | $T_A = 25^\circ C$, 30ms pulse | | 0.003 | 0.015 | %/W |
| SVR | Supply Voltage Rejection | $f = 120 \text{ Hz}$, $C_O = 25 \mu F$, $I_O = 5A$ $V_I = 6 \pm 1.5V$ | 60 | 72 | | dB |
| eN | RMS Output Noise Voltage (% of V_O) | $T_A = 25^\circ C$ $f = 10Hz \text{ to } 10KHz$ | | 0.003 | | % |
| S | Temperature Stability | | | 0.5 | | % |
| S | Long Term Stability | $T_A = 125^\circ C$ 1000Hrs | | 0.5 | | % |

ELECTRICAL CHARACTERISTICS OF KD1084#285 ($V_I=5.85V$, $C_I = C_O = 10\mu F$ (Tant.), $T_A = -40$ to $125^\circ C$, unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|--------------|--|---|-------|-------|-------|------|
| V_O | Output Voltage | $I_O = 0 \text{ mA}$ $T_J = 25^\circ C$ | 2.793 | 2.85 | 2.907 | V |
| | | $I_O = 0 \text{ to } 5A$ $V_I = 4.5 \text{ to } 10V$ | 2.765 | 2.85 | 2.935 | V |
| ΔV_O | Line Regulation | $I_O = 0 \text{ mA}$ $V_I = 4.5 \text{ to } 10V$ $T_J = 25^\circ C$ | | 0.5 | 6 | mV |
| | | $I_O = 0 \text{ mA}$ $V_I = 4.5 \text{ to } 10V$ | | 1 | 6 | mV |
| ΔV_O | Load Regulation | $I_O = 0 \text{ to } 5A$ $T_J = 25^\circ C$ | | 3 | 15 | mV |
| | | $I_O = 0 \text{ to } 5A$ | | 7 | 20 | V |
| V_d | Dropout Voltage | $I_O = 5 A$ | | 1.3 | 1.5 | V |
| I_q | Quiescent Current | $V_I \leq 10V$ | | 5 | 10 | mA |
| I_{sc} | Short Circuit Current | $V_I - V_O = 5V$ | 5.5 | 7 | | A |
| | Termal Regulation | $T_A = 25^\circ C$, 30ms pulse | | 0.003 | 0.015 | %/W |
| SVR | Supply Voltage Rejection | $f = 120 \text{ Hz}$, $C_O = 25 \mu F$, $I_O = 5A$ $V_I = 6.35 \pm 1.5V$ | 60 | 72 | | dB |
| eN | RMS Output Noise Voltage (% of V_O) | $T_A = 25^\circ C$ $f = 10Hz \text{ to } 10KHz$ | | 0.003 | | % |
| S | Temperature Stability | | | 0.5 | | % |
| S | Long Term Stability | $T_A = 125^\circ C$ 1000Hrs | | 0.5 | | % |

KD1084 SERIES

ELECTRICAL CHARACTERISTICS OF KD1084#33 ($V_I=6.3V$, $C_I=C_O=10\mu F$ (Tant.), $T_A = -40$ to $125^\circ C$, unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|--------------|--|--|-------|-------|-------|------|
| V_O | Output Voltage | $I_O = 0 \text{ mA}$ $T_J = 25^\circ C$ | 3.234 | 3.3 | 3.366 | V |
| | | $I_O = 0 \text{ to } 5A$ $V_I = 4.9 \text{ to } 10V$ | 3.2 | 3.3 | 3.4 | V |
| ΔV_O | Line Regulation | $I_O = 0 \text{ mA}$ $V_I = 4.9 \text{ to } 10V$ $T_J = 25^\circ C$ | | 0.5 | 6 | mV |
| | | $I_O = 0 \text{ mA}$ $V_I = 4.9 \text{ to } 10V$ | | 1 | 6 | mV |
| ΔV_O | Load Regulation | $I_O = 0 \text{ to } 5A$ $T_J = 25^\circ C$ | | 3 | 15 | mV |
| | | $I_O = 0 \text{ to } 5A$ | | 7 | 20 | V |
| V_d | Dropout Voltage | $I_O = 5A$ | | 1.3 | 1.5 | V |
| I_q | Quiescent Current | $V_I \leq 10V$ | | 5 | 10 | mA |
| I_{sc} | Short Circuit Current | $V_I - V_O = 5V$ | 5.5 | 7 | | A |
| | Termal Regulation | $T_A = 25^\circ C$, 30ms pulse | | 0.003 | 0.015 | %/W |
| SVR | Supply Voltage Rejection | $f = 120 \text{ Hz}$, $C_O = 25 \mu F$, $I_O = 5A$ $V_I = 6.8 \pm 1.5V$ | 60 | 72 | | dB |
| eN | RMS Output Noise Voltage (% of V_O) | $T_A = 25^\circ C$ $f = 10Hz \text{ to } 10KHz$ | | 0.003 | | % |
| S | Temperature Stability | | | 0.5 | | % |
| S | Long Term Stability | $T_A = 125^\circ C$ 1000Hrs | | 0.5 | | % |

ELECTRICAL CHARACTERISTICS OF KD1084#36 ($V_I=6.6V$, $C_I=C_O=10\mu F$ (Tant.), $T_A = -40$ to $125^\circ C$, unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|--------------|--|--|-------|-------|-------|------|
| V_O | Output Voltage | $I_O = 0 \text{ mA}$ $T_J = 25^\circ C$ | 3.528 | 3.6 | 3.672 | V |
| | | $I_O = 0 \text{ to } 5A$ $V_I = 5.2 \text{ to } 10V$ | 3.492 | 3.6 | 3.708 | V |
| ΔV_O | Line Regulation | $I_O = 0 \text{ mA}$ $V_I = 5.2 \text{ to } 10V$ $T_J = 25^\circ C$ | | 0.5 | 10 | mV |
| | | $I_O = 0 \text{ mA}$ $V_I = 5.2 \text{ to } 10V$ | | 1 | 10 | mV |
| ΔV_O | Load Regulation | $I_O = 0 \text{ to } 5A$ $T_J = 25^\circ C$ | | 3 | 15 | mV |
| | | $I_O = 0 \text{ to } 5A$ | | 7 | 20 | V |
| V_d | Dropout Voltage | $I_O = 5A$ | | 1.3 | 1.5 | V |
| I_q | Quiescent Current | $V_I \leq 10V$ | | 5 | 10 | mA |
| I_{sc} | Short Circuit Current | $V_I - V_O = 5V$ | 5.5 | 7 | | A |
| | Termal Regulation | $T_A = 25^\circ C$, 30ms pulse | | 0.003 | 0.015 | %/W |
| SVR | Supply Voltage Rejection | $f = 120 \text{ Hz}$, $C_O = 25 \mu F$, $I_O = 5A$ $V_I = 7.1 \pm 1.5V$ | 60 | 72 | | dB |
| eN | RMS Output Noise Voltage (% of V_O) | $T_A = 25^\circ C$ $f = 10Hz \text{ to } 10KHz$ | | 0.003 | | % |
| S | Temperature Stability | | | 0.5 | | % |
| S | Long Term Stability | $T_A = 125^\circ C$ 1000Hrs | | 0.5 | | % |

ELECTRICAL CHARACTERISTICS OF KD1084#5 ($V_I=8V$, $C_I = C_O = 10\mu F$ (Tant.), $T_A = -40$ to $125^\circ C$, unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|--------------|--|--|------|-------|-------|------|
| V_O | Output Voltage | $I_O = 0 \text{ mA}$ $T_J = 25^\circ C$ | 4.9 | 5 | 5.1 | V |
| | | $I_O = 0 \text{ to } 5A$ $V_I = 6.6 \text{ to } 10V$ | 4.85 | 5 | 5.15 | V |
| ΔV_O | Line Regulation | $I_O = 0 \text{ mA}$ $V_I = 6.6 \text{ to } 10V$ $T_J = 25^\circ C$ | | 0.5 | 10 | mV |
| | | $I_O = 0 \text{ mA}$ $V_I = 6.6 \text{ to } 10V$ | | 1 | 10 | mV |
| ΔV_O | Load Regulation | $I_O = 0 \text{ to } 5A$ $T_J = 25^\circ C$ | | 5 | 20 | mV |
| | | $I_O = 0 \text{ to } 5A$ | | 10 | 35 | V |
| V_d | Dropout Voltage | $I_O = 5A$ | | 1.3 | 1.5 | V |
| I_q | Quiescent Current | $V_I \leq 10V$ | | 5 | 10 | mA |
| I_{sc} | Short Circuit Current | $V_I - V_O = 5V$ | 5.5 | 7 | | A |
| | Termal Regulation | $T_A = 25^\circ C$, 30ms pulse | | 0.003 | 0.015 | %/W |
| SVR | Supply Voltage Rejection | $f = 120 \text{ Hz}$, $C_O = 25 \mu F$, $I_O = 5A$ $V_I = 8.5 \pm 1.5V$ | 60 | 72 | | dB |
| eN | RMS Output Noise Voltage (% of V_O) | $T_A = 25^\circ C$ $f = 10\text{Hz} \text{ to } 10\text{KHz}$ | | 0.003 | | % |
| S | Temperature Stability | | | 0.5 | | % |
| S | Long Term Stability | $T_A = 125^\circ C$ 1000Hrs | | 0.5 | | % |

ELECTRICAL CHARACTERISTICS OF KD1084 ($V_I=4.25V$, $C_I = C_O = 10\mu F$ (Tant.), $T_A = -40$ to $125^\circ C$, unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|------------------|--|--|-------|-------|-------|---------|
| V_O | Output Voltage | $I_O = 10mA$ $T_J = 25^\circ C$ | 1.225 | 1.25 | 1.275 | V |
| | | $I_O = 10mA \text{ to } 5A$ $V_I = 2.85 \text{ to } 10V$ | 1.213 | 1.25 | 1.287 | V |
| ΔV_O | Line Regulation | $I_O = 10mA$ $V_I = 2.85 \text{ to } 10V$ $T_J = 25^\circ C$ | | 0.015 | 0.2 | % |
| | | $I_O = 10mA$ $V_I = 2.85 \text{ to } 10V$ | | 0.035 | 0.2 | % |
| ΔV_O | Load Regulation | $I_O = 10mA \text{ to } 5A$ $T_J = 25^\circ C$ | | 1 | 0.3 | % |
| | | $I_O = 10mA \text{ to } 5A$ | | 0.2 | 0.4 | % |
| V_d | Dropout Voltage | $I_O = 5A$ | | 1.3 | 1.5 | V |
| $I_{O(min)}$ | Minimum Load Current | $V_I = 10V$ | | 3 | 10 | mA |
| I_{sc} | Short Circuit Current | $V_I - V_O = 5V$ | 5.5 | 7 | | A |
| | Termal Regulation | $T_A = 25^\circ C$, 30ms pulse | | 0.003 | 0.015 | %/W |
| SVR | Supply Voltage Rejection | $f = 120 \text{ Hz}$, $C_O = 25 \mu F$, $C_{ADJ} = 25 \mu F$, $I_O = 5A$ $V_I = 4.75 \pm 1.5V$ | 60 | 72 | | dB |
| I_{ADJ} | Adjust Pin Current | $V_I = 4.25V$ $I_O = 10 mA$ | | 55 | 120 | μA |
| ΔI_{ADJ} | Adjust Pin Current Change | $I_O = 10mA \text{ to } 5A$ $V_I = 2.85 \text{ to } 10V$ | | 0.2 | 5 | μA |
| eN | RMS Output Noise Voltage (% of V_O) | $T_A = 25^\circ C$ $f = 10\text{Hz} \text{ to } 10\text{KHz}$ | | 0.003 | | % |
| S | Temperature Stability | | | 0.5 | | % |
| S | Long Term Stability | $T_A = 125^\circ C$ 1000Hrs | | 0.5 | | % |

KD1084 SERIES

TYPICAL CHARACTERISTICS (unless otherwise specified $T_j = 25^\circ\text{C}$, $C_l=10\mu\text{F}$ (tant.), $C_O=10\mu\text{F}$ (tant.))

Figure 1 : Dropout Voltage vs Output Current

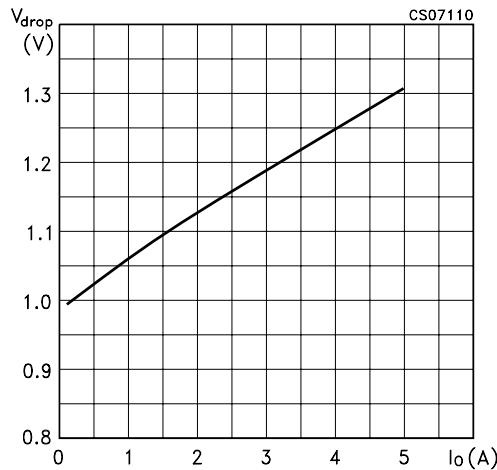


Figure 2 : Dropout Voltage vs Temperature

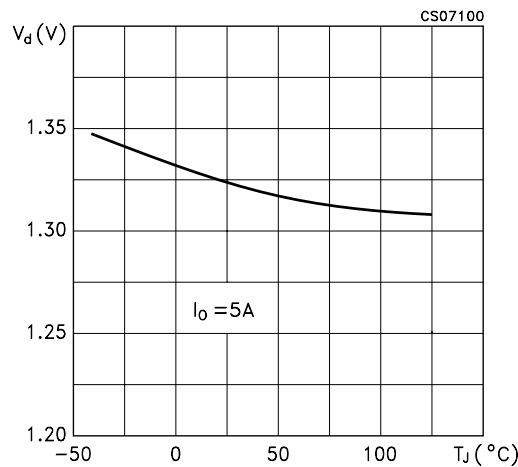


Figure 3 : Short Circuit Current vs Dropout Voltage

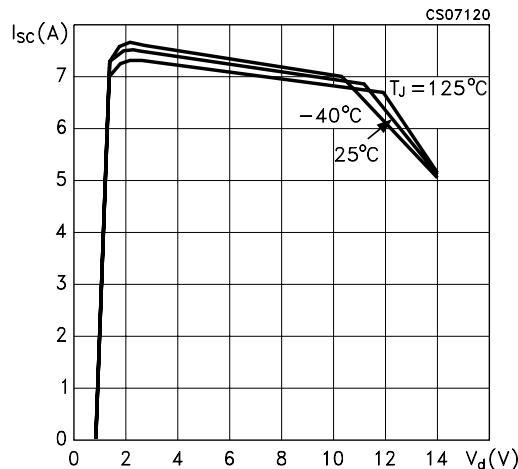


Figure 4 : Line Regulation vs Temperature

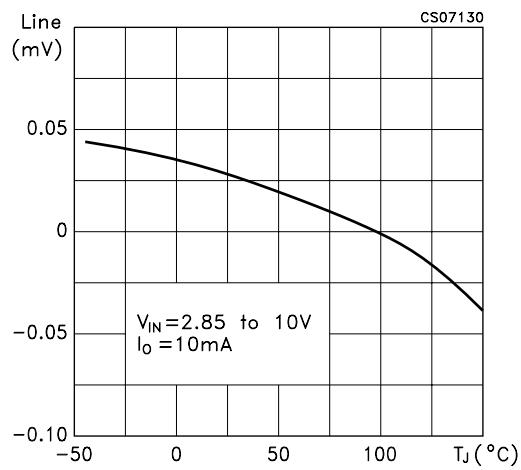


Figure 5 : Output Voltage vs Temperature

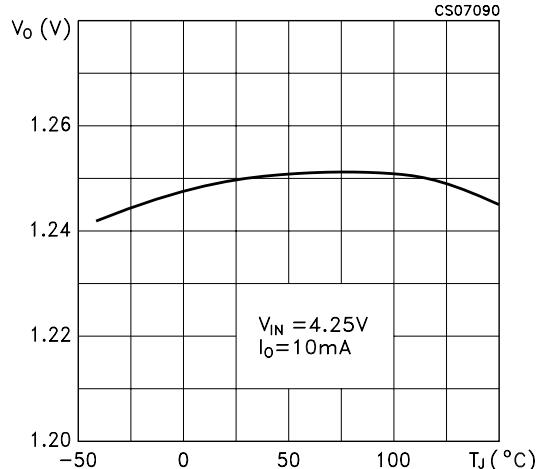


Figure 6 : Load Regulation vs Temperature

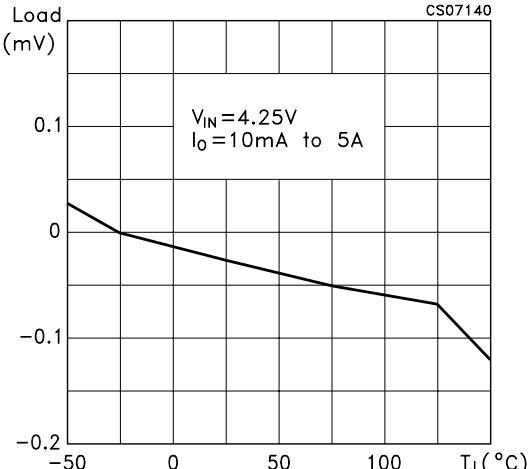


Figure 7 : Supply Voltage Rejection vs Frequency

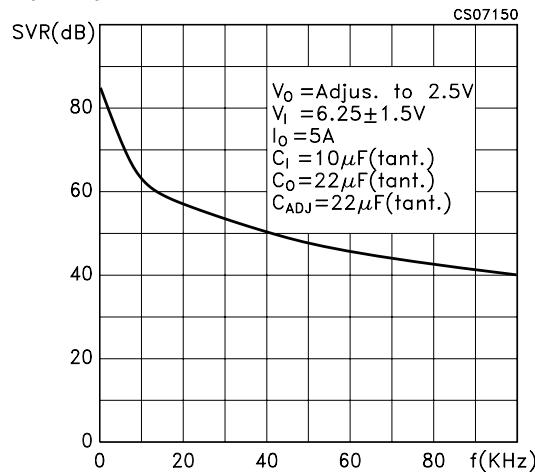


Figure 8 : Adjust Pin Current vs Output Current

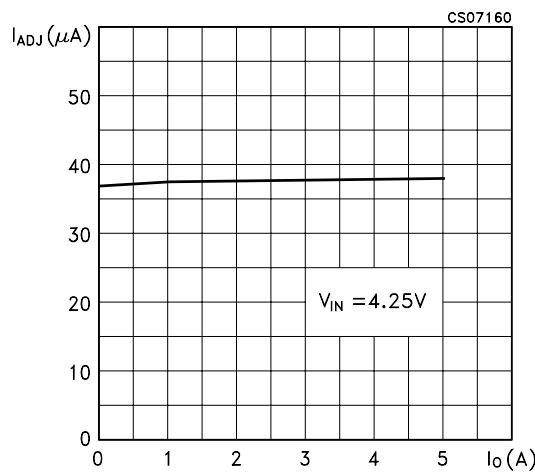


Figure 9 : Line Transient



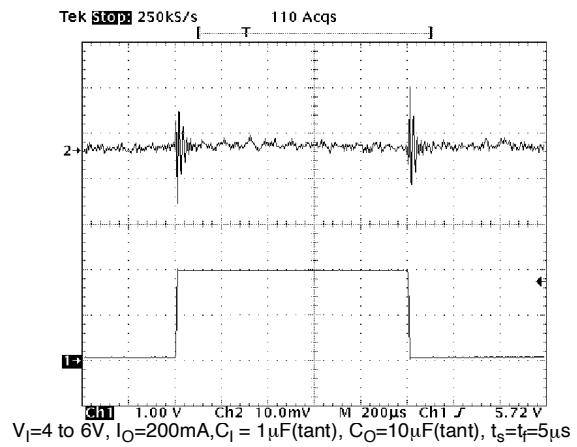


Figure 10 : Load Transient

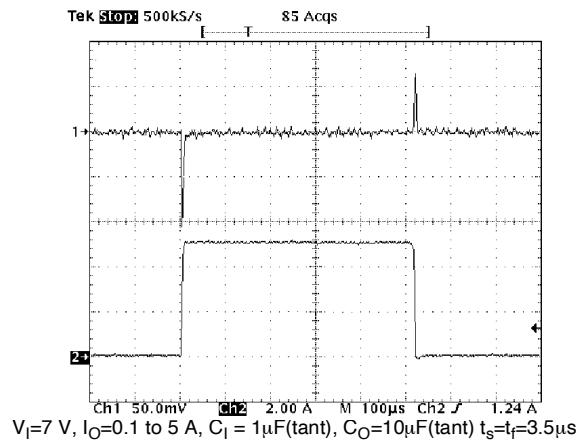

TO-220 MECHANICAL DATA


| DIM. | mm. | | | inch | | |
|------|-------|------|-------|-------|-------|-------|
| | MIN. | TYP. | MAX. | MIN. | TYP. | MAX. |
| A | 4.40 | | 4.60 | 0.173 | | 0.181 |
| C | 1.23 | | 1.32 | 0.048 | | 0.051 |
| D | 2.40 | | 2.72 | 0.094 | | 0.107 |
| D1 | | 1.27 | | | 0.050 | |
| E | 0.49 | | 0.70 | 0.019 | | 0.027 |
| F | 0.61 | | 0.88 | 0.024 | | 0.034 |
| F1 | 1.14 | | 1.70 | 0.044 | | 0.067 |
| F2 | 1.14 | | 1.70 | 0.044 | | 0.067 |
| G | 4.95 | | 5.15 | 0.194 | | 0.203 |
| G1 | 2.4 | | 2.7 | 0.094 | | 0.106 |
| H2 | 10.0 | | 10.40 | 0.393 | | 0.409 |
| L2 | | 16.4 | | | 0.645 | |
| L4 | 13.0 | | 14.0 | 0.511 | | 0.551 |
| L5 | 2.65 | | 2.95 | 0.104 | | 0.116 |
| L6 | 15.25 | | 15.75 | 0.600 | | 0.620 |
| L7 | 6.2 | | 6.6 | 0.244 | | 0.260 |
| L9 | 3.5 | | 3.93 | 0.137 | | 0.154 |
| DIA. | 3.75 | | 3.85 | 0.147 | | 0.151 |

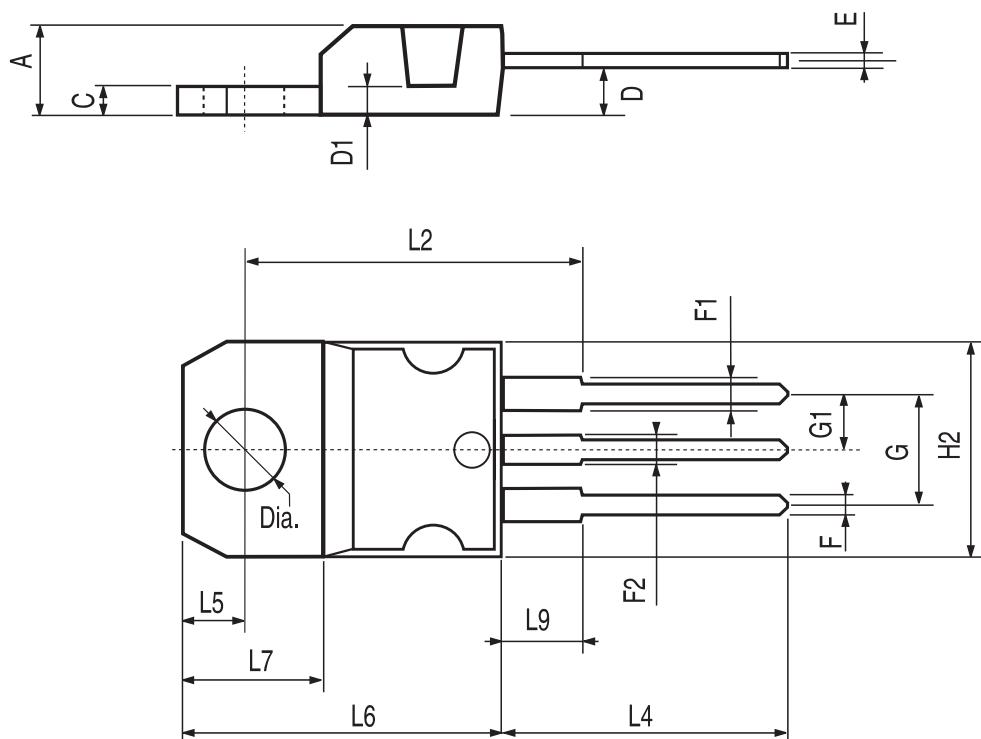

P011C


D²PAK MECHANICAL DATA

| DIM. | mm. | | | inch | | |
|------|------|------|-------|-------|-------|-------|
| | MIN. | TYP. | MAX. | MIN. | TYP. | MAX. |
| A | 4.4 | | 4.6 | 0.173 | | 0.181 |
| A1 | 2.49 | | 2.69 | 0.098 | | 0.106 |
| A2 | 0.03 | | 0.23 | 0.001 | | 0.009 |
| B | 0.7 | | 0.93 | 0.027 | | 0.036 |
| B2 | 1.14 | | 1.7 | 0.044 | | 0.067 |
| C | 0.45 | | 0.6 | 0.017 | | 0.023 |
| C2 | 1.23 | | 1.36 | 0.048 | | 0.053 |
| D | 8.95 | | 9.35 | 0.352 | | 0.368 |
| D1 | | 8 | | | 0.315 | |
| E | 10 | | 10.4 | 0.393 | | 0.409 |
| E1 | | 8.5 | | | 0.335 | |
| G | 4.88 | | 5.28 | 0.192 | | 0.208 |
| L | 15 | | 15.85 | 0.590 | | 0.624 |
| L2 | 1.27 | | 1.4 | 0.050 | | 0.055 |
| L3 | 1.4 | | 1.75 | 0.055 | | 0.068 |
| M | 2.4 | | 3.2 | 0.094 | | 0.126 |
| R | | 0.4 | | | 0.016 | |
| V2 | 0° | | 8° | 0° | | 8° |

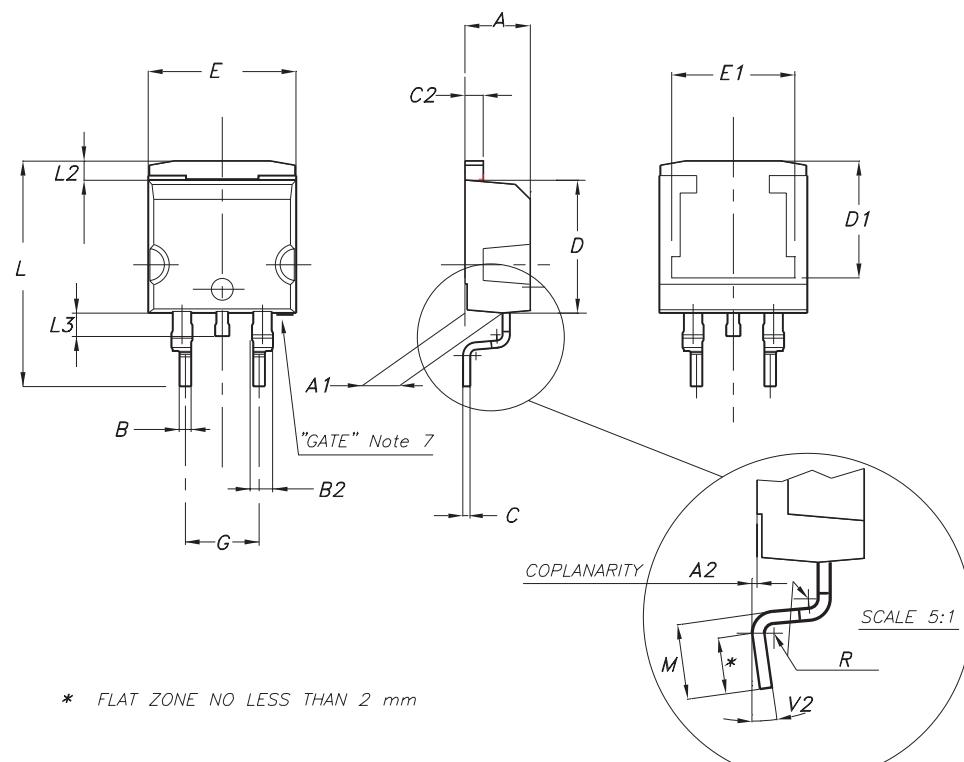


D²PAK/A MECHANICAL DATA

| DIM. | mm. | | | inch | | |
|------|------|------|-------|-------|------|-------|
| | MIN. | TYP. | MAX. | MIN. | TYP. | MAX. |
| A | 4.40 | | 4.60 | 0.173 | | 0.181 |
| A1 | 2.49 | | 2.69 | 0.098 | | 0.106 |
| B | 0.7 | | 0.93 | 0.027 | | 0.036 |
| B2 | 1.14 | | 1.7 | 0.044 | | 0.067 |
| C | 0.45 | | 0.60 | 0.017 | | 0.023 |
| C2 | 1.21 | | 1.36 | 0.047 | | 0.053 |
| D | 8.95 | | 9.35 | 0.352 | | 0.368 |
| E | 10 | | 10.4 | 0.393 | | 0.409 |
| G | 4.88 | | 5.28 | 0.192 | | 0.208 |
| L | 15 | | 15.85 | 0.590 | | 0.106 |
| L2 | 1.27 | | 1.4 | 0.050 | | 0.055 |

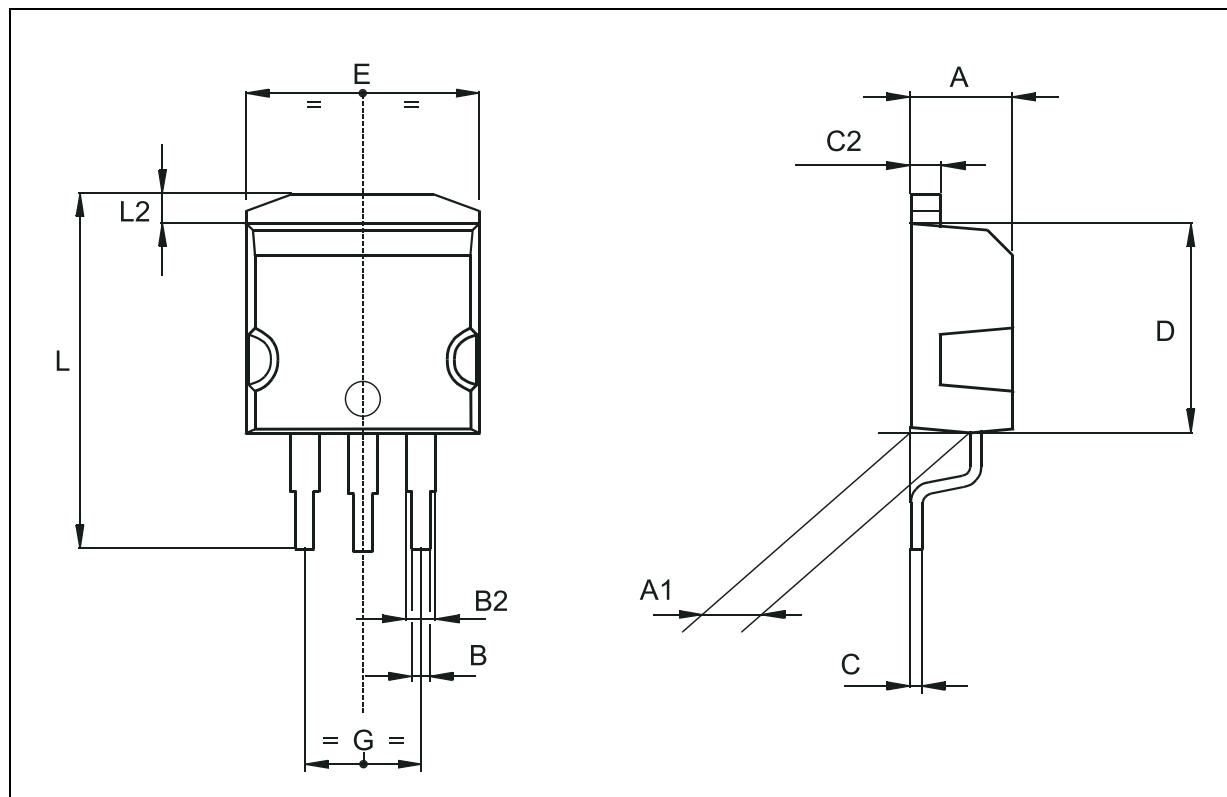

DPAK MECHANICAL DATA

| DIM. | mm. | | | inch | | |
|------|------|------|------|-------|-------|-------|
| | MIN. | TYP. | MAX. | MIN. | TYP. | MAX. |
| A | 2.2 | | 2.4 | 0.086 | | 0.094 |
| A1 | 0.9 | | 1.1 | 0.035 | | 0.043 |
| A2 | 0.03 | | 0.23 | 0.001 | | 0.009 |
| B | 0.64 | | 0.9 | 0.025 | | 0.035 |
| B2 | 5.2 | | 5.4 | 0.204 | | 0.212 |
| C | 0.45 | | 0.6 | 0.017 | | 0.023 |
| C2 | 0.48 | | 0.6 | 0.019 | | 0.023 |
| D | 6 | | 6.2 | 0.236 | | 0.244 |
| E | 6.4 | | 6.6 | 0.252 | | 0.260 |
| G | 4.4 | | 4.6 | 0.173 | | 0.181 |
| H | 9.35 | | 10.1 | 0.368 | | 0.397 |
| L2 | | 0.8 | | | 0.031 | |
| L4 | 0.6 | | 1 | 0.023 | | 0.039 |

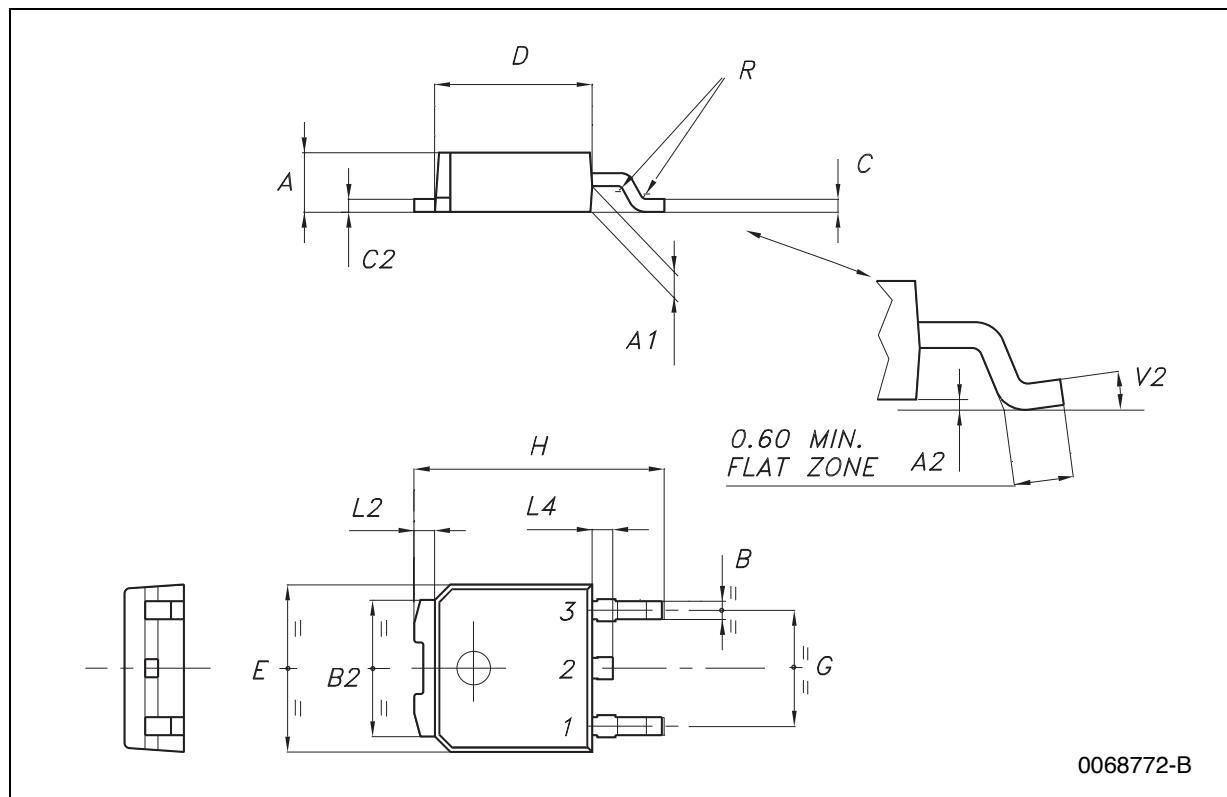

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

© The ST logo is a registered trademark of STMicroelectronics

© 2002 STMicroelectronics - Printed in Italy - All Rights Reserved
STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco
Singapore - Spain - Sweden - Switzerland - United Kingdom - United States.

© <http://www.st.com>